ARXWIDE

IN PAINTED STEEL

LCD / LED



FEATURES:

- Structure in powdered painted steel
- Wheels of cast steel and polyurethane external coating
- **2 versions:**
  - Without printer
  - With printer

AC/DC | BAT INT

NO VERIF | IP 54 | PCS | PRINT INT

LED | LCD INDICATOR:


- ABS housing
- IP54 protection
- Units: kg an lb
- Bubble level
- Rechargeable battery 6V 4,5Ah
- Power supply AC/DC 100 - 240 Vac 50/60 Hz
- Operating temperature: -10ºC a 40ºC


FUNCTIONS:

- Weight accumulation
- Zero
- Tare
- Gross/Net
- Piece counting function
- Checkweighter function
- Hold function
- Percentage weighing

PRINTING:

- Printer version prints tare, gross and net
- Date and time

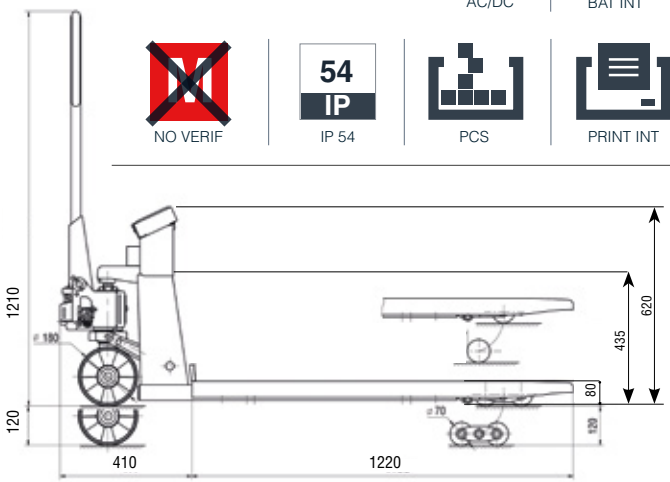

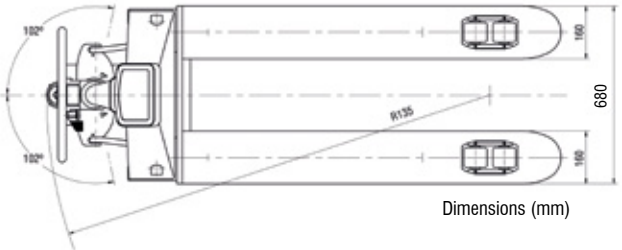

Dimensions (mm)

ARX LED

Code #	Capacity (kg)	Readout (kg)	Printer	PACKING Dimensions (mm)	PACKING Weight (kg)	Certifications ENAC Code #
261210	2000	0,5		1700x800x1400	130	900004
261211	2000	0,5		1700x600x1400	130	900004

ARX LCD

Code #	Capacity (kg)	Readout (kg)	Printer	PACKING Dimensions (mm)	PACKING Weight (kg)	Certifications ENAC Code #
261212	2000	0,5		1700x800x1400	130	900004
261213	2000	0,5		1700x800x1400	130	900004