


series
BAS **M**
VERIF

INTERNAL CALIBRATION

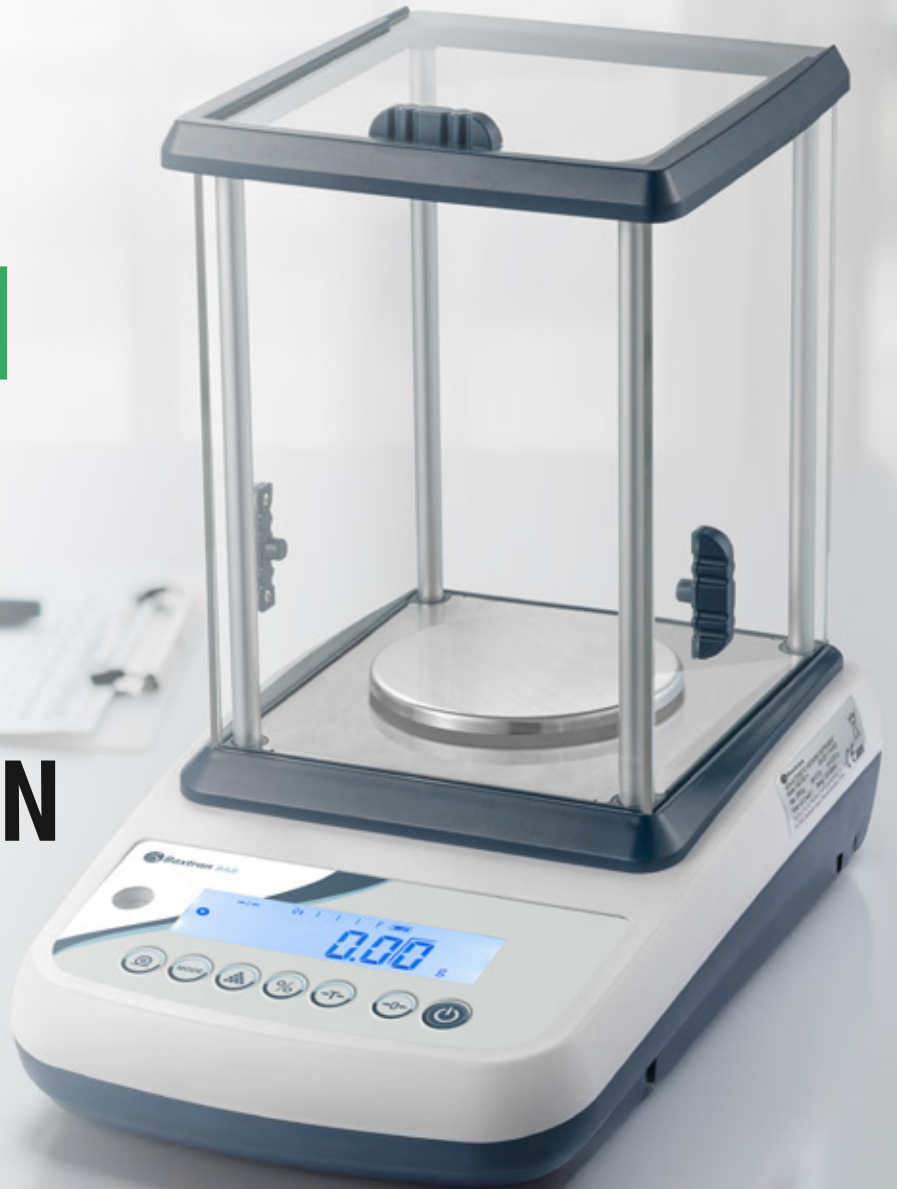

VERIFIED LABORATORY BALANCES

Perfect for applications requiring precision and regulatory compliance

Maximum readability: 100 mg
Capacity: from 600 g to 6000 g




BACKLIT LCD DISPLAY



VERSION WITH OR WITHOUT DRAFT SHIELD DEPENDING ON CAPACITY

Verified balances

High-precision balance featuring internal calibration
Ideal for laboratory environments

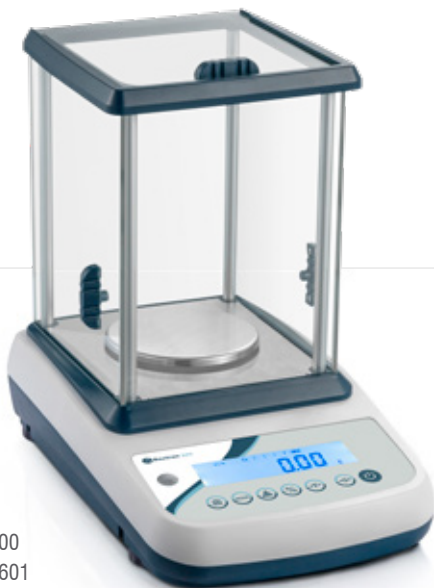

MODELS
600 - Ref. 261600
1200 - Ref. 261601

Features:


- Internal calibration
- 16.5 mm backlit LCD display
- 6 keys with direct functions
- Height-adjustable feet
- Bubble level
- Rechargeable battery (up to 20 hours of continuous use)
- Draft shield versions:
 - 600 g / 1200 g models include a glass draft shield with three sliding doors (two side and one top) for easy access
 - 3000 g / 6000 g models come without draft shield
- Multiple weighing units
- Capacity range: from 600 g to 6000 g
- Connectivity via USB and RS232
- Class II
- Power plug adapters included: A, C, G, I

Functions:

- Tare
- Percent weighing
- Piece counting
- Internal auto-calibration



MODELS
3000 - Ref. 261602
6000 - Ref. 261603

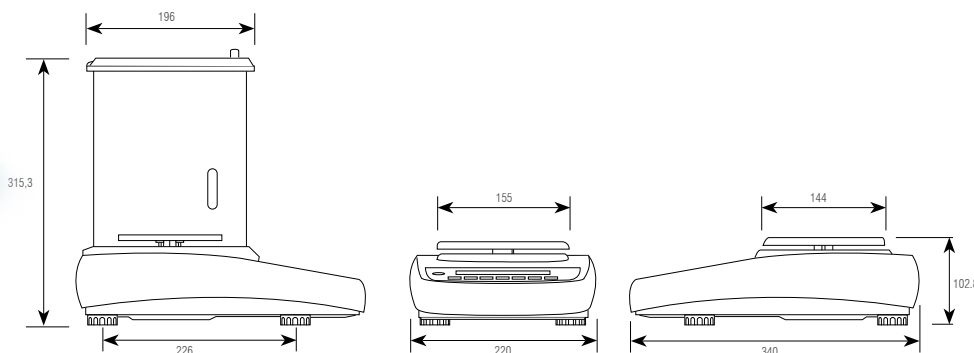

Dimensiones (mm)

Models

Code#	Capacity (g)	Readability <i>d</i> (g)	Verification scale interval <i>e</i> (g)	Divisions	Pan dimensions (mm)	Internal calibration	Auto-calibration	Draft shield	ENAC Cert. Code #
261600	600	0,01	0,1	6000e	Ø120		yes	yes	901011
261601	1200	0,02	0,2	6000e	Ø120		yes	yes	901011
261602	3000	0,05	0,5	6000e	140 x 150		yes	-	901011
261603	6000	0,1	1	6000e	140 x 150		yes	-	901012

Accessories

Código#	Description
910211	Dust cover (for models with draft shield)
910019	Blister (plastic cover)
910208	Bench ionizer
910012	Sample cutter 8/9 mm
910033	50 Weighing dishes
See catalog	Printers
See catalog	RS232 cables for PC/printer
See catalog	Gender adapters / converters

LCD Screen

