BR80

Indicator

Weight tare indicator

PCS | MOVE | RS232 | RS232 | BAT INT | AC/DC | IP54 | NO VERIF

FEATURES:

- Weight tare indicator.
- ABS housing.
- IP54 protection.
- Waterproof keyboard with 6 function keys.
- Red LED display with 6 digits of 20 mm (BR80) and 40 mm (BR8040).
- 7 LEDs to indicate the condition.
- Support column included.
- Up to 4 load cells de 350 Ω or up to 8 load cells of 700 Ω.
- Operating temperature range: - 10ºC +40ºC.
- Power supply with adaptor AC/DC 100-240Vac 50-60Hz.
- Rechargeable Internall battery 6V/4Ah.
- 1 RS232 output for connection to PC, printer, repeater, etc.
- Units: kg and lb.
- Programmable gravity.
- Auto switch off.

- Up to 100000 not approved divisions

KEYBOARD FUNCTIONS:

- Zero, Tare, Accumulation manual, Function selection, On/Off..

FUNCTIONS:

- Accumulation
- Totalization
- Zero
- Tare and manual pretare
- Piece counting function
- Weight fixation (HOLD)
- High resolution x10
- Printer languages

PRINTING:


- Normal printing with: Ticket number. Gross. Tare. Net.
- Accumulation printing with: Ticket number. Accumulated weight.
- Print of the total number of weighs and net weight accumulated



BR80



BR8040

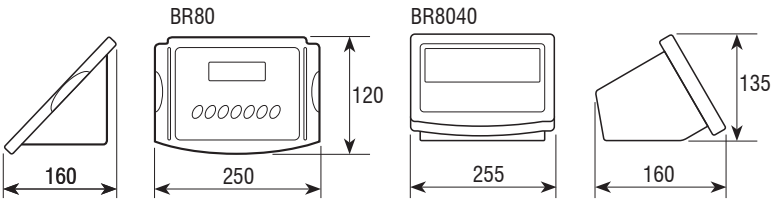

Dimensions (mm)



RS232 output

Code #	Description	Packing dimensions (mm)	Packing weight (kg)
260198	ABS weight tare indicator BR80	270x175x175	2,2
260199	ABS weight tare indicator BR8040	270x175x175	2,2

Accessories

Code #	Accessories description
910034	IMP27 printer
910035	IMP28 printer
910112	Stainless steel column (600 mm) with aluminium fixation base
910029	Stainless steel column (600 mm) with painted fixation base
910030	Stainless steel column (300 mm) with painted fixation base
910031	Stainless steel column (300 mm) and fixation base
260469	Steel repeater with digits of 80 mm
260708	Steel repeater with digits of 130 mm
260470	Stainless steel repeater with digits of 80 mm