MKS

Bench Scale

Bench scale set (platform + column + indicator) Valid for legal metrology


PCS | MOVE | RS232 | RS232 | BAT INT | AC/DC | IP54 | VERIF

FEATURES:


- EC approval.
- Load cell with prof. certify OIML R-60 C3.
- Column for the indicator.
- Three different versions:
  - Version (P): 350x450 mm. Tubular framework in steel, sheet in stainless steel and aluminium load cell IP65.
  - Version (M): 420x520 mm. Structure in die casting aluminium, sheet in stainless steel and aluminium load cell IP65.
  - Version (G): 600x800 mm. Tubular framework in steel, sheet in stainless steel and aluminium load cell IP65.
- ABS indicator, model BR40.
- IP54 protection.
- Waterproof keyboard with 7 function keys.
- Backlight LCD display with 6 digits of 24 mm.
- Functions indication on the display.
- ABS support column.
- Operating temperature range: from 0ºC to +40ºC.
- Power supply with adaptor AC/DC 230Vac 50Hz.
- Internal rechargeable battery, at last 90 hours.
- Optional RS232 output (PC and print format).
- Units: kg.
  Units without legal metrology: kg, lb and t.
- Auto switch off.

FUNCTIONS:

- Accumulation
- Gross/Net
- Automatic Tare
- Zero
- Piece counting function
- Limit function
- Weight filter for animals
- High resolution x10
- Hold/peak function

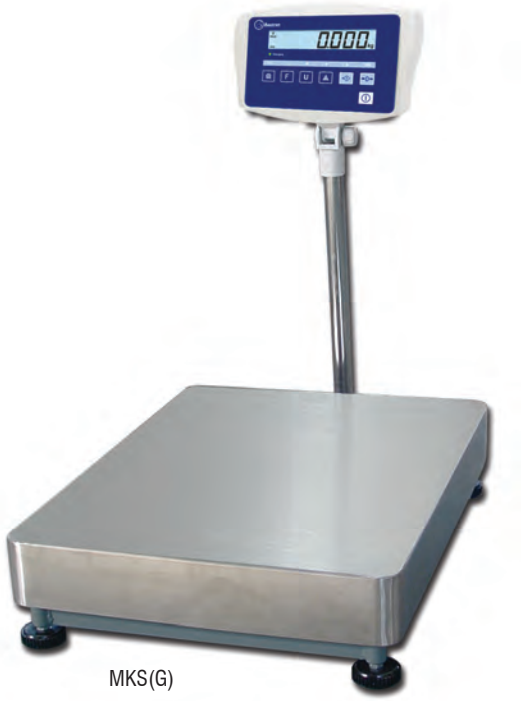

MKS(G)

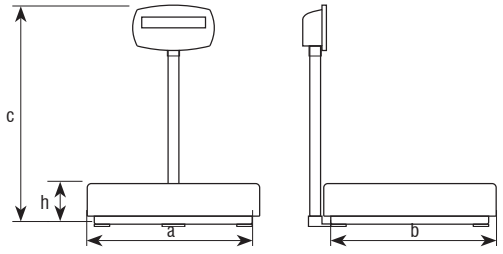



MKS(P) MKS(M)

Dimensions axb (mm)	c	h
350x450	900	110
420x520	900	120
600x800	900	160

Code #	Capacity (kg)	Readout (g)	Readout CE-M (g)	Pan dimensions (mm)	Packing dimensions (mm)	Packing weight (kg)	Certifications	
							Homologation M	ENAC
							Code #	Code #
260393	30	2	10	350x450	530x770x210	14	900018	900001
260396	60	5	20	350x450	530x770x210	14	900018	900001
260392	150	10	50	350x450	530x770x210	14	900019	900002
260395	60	5	20	420x520	570x820x210	18	900018	900001
260391	150	10	50	420x520	570x820x210	18	900019	900002
260394	300	20	100	420x520	570x820x210	18	900019	900002
260397	600	50	200	600x800	680x1120x240	50	900020	900003

Accessories

Code #	Accessories description
MKS232	RS232 output