Baxtran **SR**

Bench scale

Bench scale set (platform + column + indicator)

PCS | CHECK | MOVE | RS232 | RS232 | BAT INT | AC/DC | IP65 | VERIF

FEATURES:

- Valid for legal metrology.
- EC approval.
- Load cell with rehearse approval OIML R60 C3.
- 3 different versions:
  - V1. Tubular structure in painted steel. Pan in stainless steel. Aluminium load cell, IP65. Column in polished stainless steel and platform fixation base in aluminium CI2 model.
  - V2. Tubular structure in stainless steel. Pan in stainless steel. Aluminium load cell, IP65. The load cell is covered by a rubber protection which provides an IP68 sealing. Column in polished stainless steel and platform fixation base in die casting aluminium CI model.
  - V3. Tubular structure in stainless steel. Stainless steel pan. Stainless steel load cell, IP68. Column in polished stainless steel and platform fixation base in die casting aluminium CI model.
- Column for the indicator.

- ABS indicator, model BR30.
- Backlight LCD display with digits of 50 mm.
- Approval up to 3.000 and 6.000 divisions OIML class III.
- EC approval.
- Multi-range (1or 2 ranges).
- IP65 protection.
- Operating temperature range: -10ºC +40ºC.
- Power supply with adaptor AC/DC 100-240Vac 50-60Hz.
- Internal rechargeable battery, it lasts more than 90 hours.
- Optional RS232 output.
- Units: kg.
  Units without legal metrology: kg and lb.
- Keyboard locker.
- Programmable auto switch off.



FUNCTIONS:

- Accumulation
- Gross/Net
- Automatic tare and memory tare
- Piece counting
- Limit function
- Animal weighing

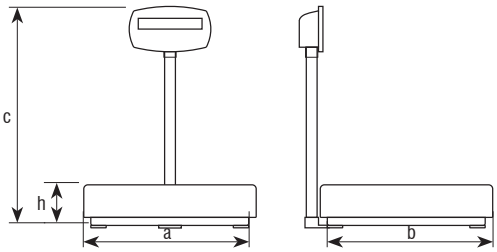

Dimensions axb (mm)	c	h(min.)	h(max.)
400x400	900	127	140
600x600	900	140	155
800x800	900	185	195

V1 Code #	260492	260495	260489	260497	260491	260494	260490	260493	260496
V2 Code #	260501	260504	260498	260506	260500	260503	260499	260502	260505
V3 Code #	260510	260513	260507	260515	260509	260512	260508	260511	260514
Capacity (kg)	30	60	150	60	150	300	150	300	600
Readout (g)	5	10	20	10	20	50	20	50	100
Readout CE-M (g)	10	20	50	20	50	100	50	100	200
Dimensions (mm)	400x400			600x600			800x800		
Packing dimensions (mm)	790x530x165 + 330x250x220			815x730x215 + 330x250x220			880x865x220 + 330x250x220		
Packing weight (kg)	13 + 3,2			30 + 3,2			60 + 3,2		
Certifications									
M Homologation	Code #	900018	900019	900018	900019				900020
ENAC	Code #	900001	900002	900001	900002				900003

Accessories

Code #	Accessories description
SR232	RS232 output